



COEFFICIENT OF THERMAL TRANSFER & TRANSMISSION G-S Hypo Cement

Coefficient of Thermal Transfer, 0-50°C:


Approx. 700 ppm

Glass Transition:

Approx. 50°C / 120°F

Transmission:

The cement has 90% transmission in the visible region at a nominal thickness of 8 mils (~200 microns), with minimal transmission at wavelengths less than 300nm.

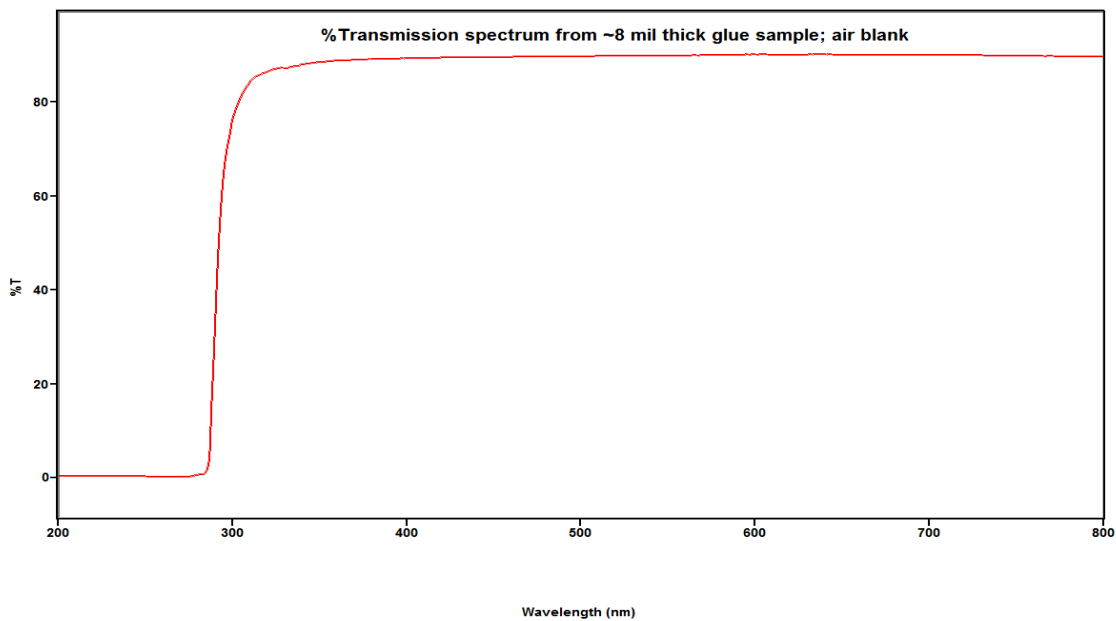

1150 University Avenue
Suite 5
Rochester NY 14607-1663

Toll-Free 800.295.3050
Phone 585.241.2370
Fax 585.241.2375

www.gssupplies.com
info@gssupplies.com

www.toolsgs.com